


# Model EC25

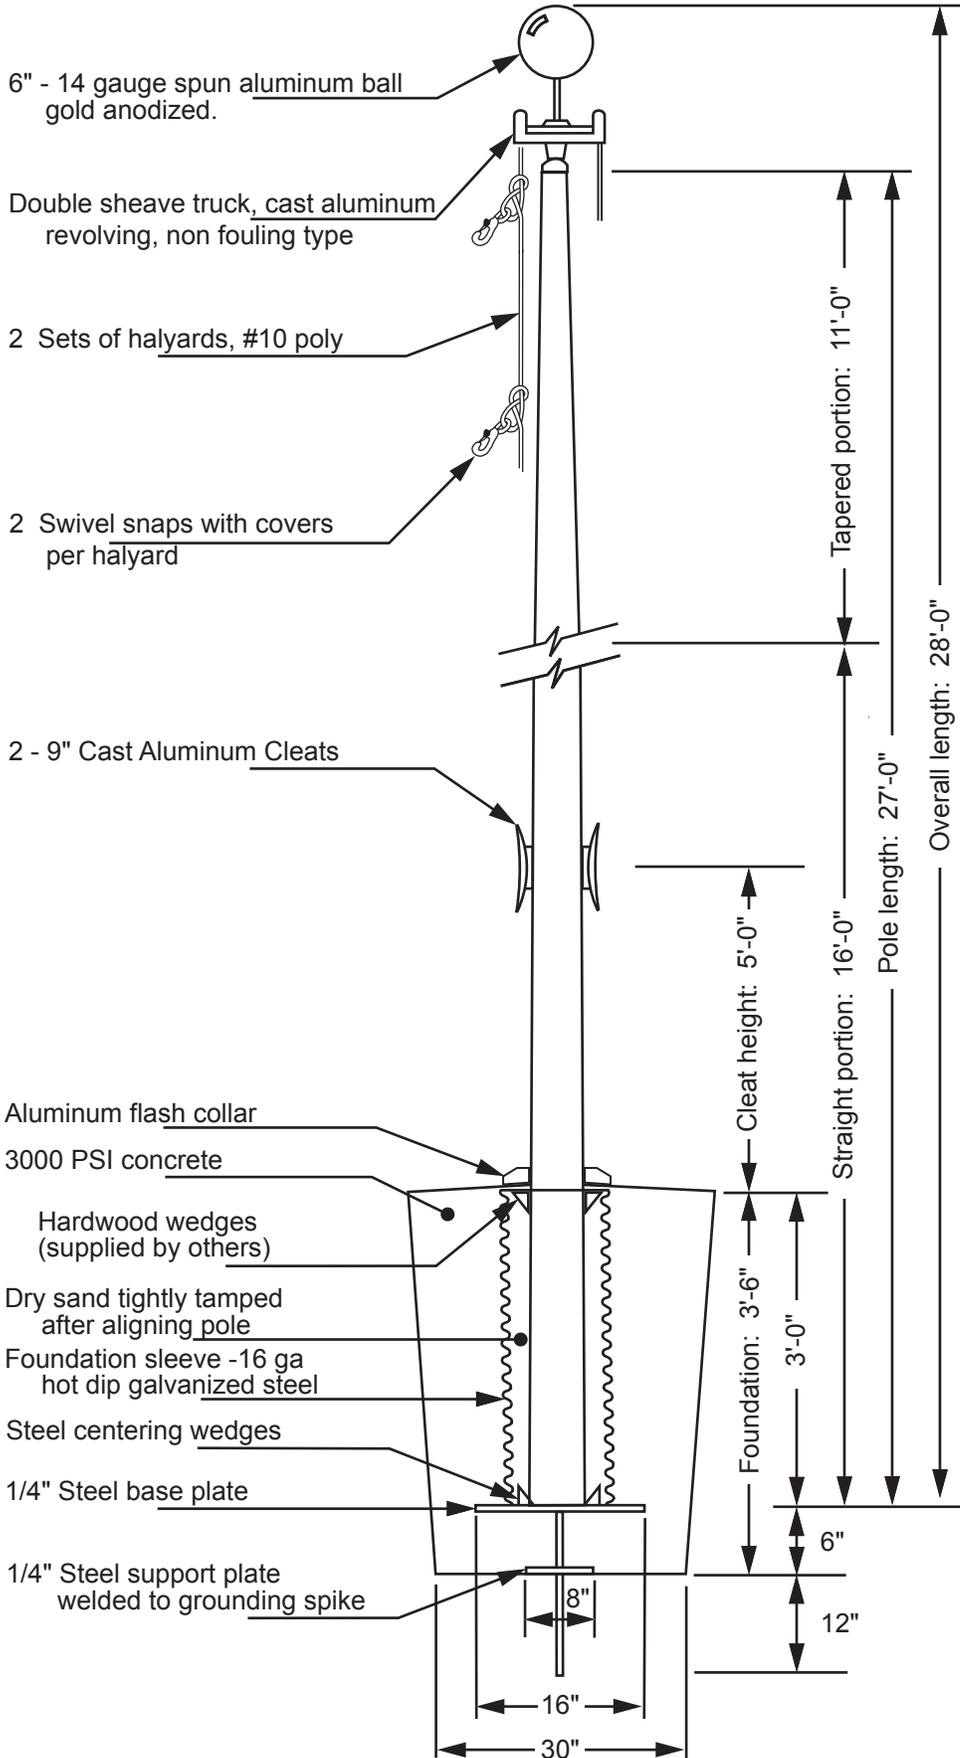

6" - 14 gauge spun aluminum ball gold anodized.

Double sheave truck, cast aluminum revolving, non fouling type

2 Sets of halyards, #10 poly

2 Swivel snaps with covers per halyard

2 - 9" Cast Aluminum Cleats

Aluminum flash collar

3000 PSI concrete

Hardwood wedges (supplied by others)


Dry sand tightly tamped after aligning pole

Foundation sleeve -16 ga hot dip galvanized steel

Steel centering wedges

1/4" Steel base plate

1/4" Steel support plate welded to grounding spike

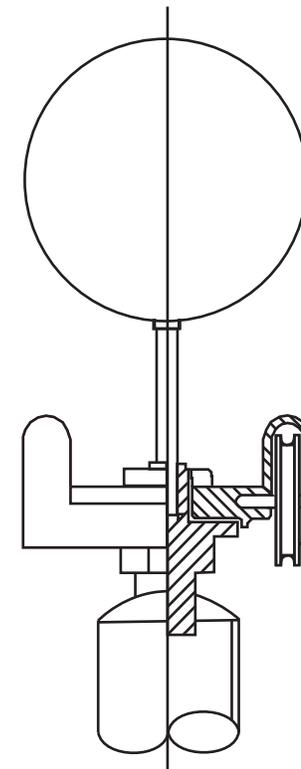

### Truck Detail

Revolving, non-fouling truck  
Cast aluminum body  
Stainless steel ball bearings  
Nylon sheaves  
Cast aluminum spindle

All shafts with overall length of more than 38'-6" are shipped in two sections.

Each section matched marked for field assembly. Exposed portion of jam sleeve must be **well lubricated** prior to assembly.

1-1/2" maximum shop gap allowed for field fitting (ram for tight joint)



Project:	Ground set tapered aluminum flagpole: ALLOY: 6063T6	EDER FLAG	Date:
Location:	Exposed height: 25'-0"	Overall height: 28'-0"	Revision:
Architect:	Ship in 1 section	Butt diameter: 6"	1000 W. Rawson Avenue
Contractor:	Top diameter: 3-1/2"	Wall thickness: .188"	Oak Creek, WI 53154
Customer:	Finish: 100 grit polish		Job: