



Model ECP60 YG

12" - 14 gauge spun aluminum ball
gold anodized

Single sheave truck, cast
aluminum revolving,
non-fouling type

2 Bronze swivel snaps
with covers per halyard

4 Sets of halyard: #10 poly

14'-0" Yardarm

3-1/2" center

2" ends

3 - 9" Cast aluminum cleat

Aluminum flash collar

3000 PSI concrete

Hardwood wedges
(supplied by others)


Dry sand tightly tamped
after aligning pole

Foundation sleeve -16 ga
hot dip galvanized steel

Steel centering wedges

1/4" Steel base plate

1/4" Steel support plate
welded to grounding
spike

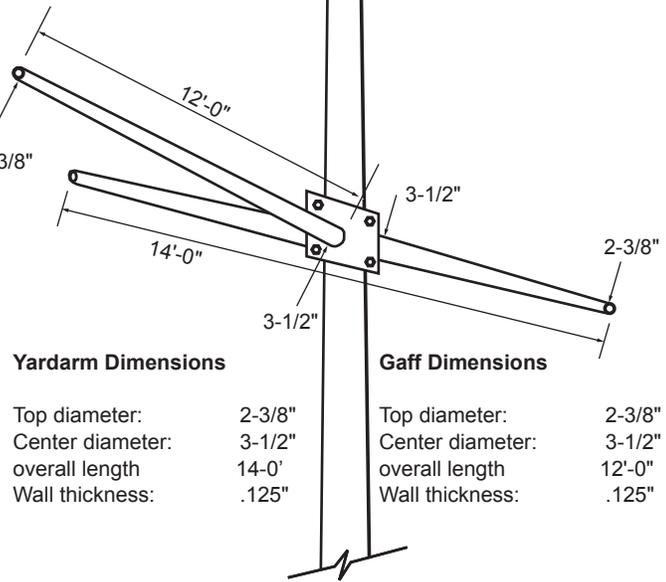


Yardarm Dimensions

Top diameter: 2-3/8"
Center diameter: 3-1/2"
overall length: 14'-0"
Wall thickness: .125"

Gaff Dimensions

Top diameter: 2-3/8"
Center diameter: 3-1/2"
overall length: 12'-0"
Wall thickness: .125"

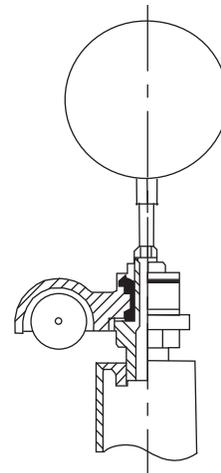

Truck Detail

Aluminum body
Stainless steel ball bearings
Aluminum sheave
Cast aluminum spindle

Filename: ECP60 YG (yardarm and gaff single sheave_revolving truck.ai)

Project:	Ground set tapered aluminum flagpole: ALLOY: 6063T6	EDER FLAG	Date:
Location:	Exposed height: 60'-0"	Overall height: 66'-0"	Revision:
Architect:	Ship in 2 section	Butt diameter: 12"	1000 W. Rawson Avenue
Contractor	Top diameter: 4"	Wall thickness: .250"	Oak Creek, WI 53154
Customer:	Finish: 100 grit polish		Job: