



Model ECPDM25

6" - 14 gauge spun aluminum ball
gold anodized

Single sheave truck, cast aluminum
revolving, non-fouling type

2 Bronze swivel snaps with covers
per halyard

6'-6" Yardarm

2" ends

Gaff

3-1/2" center

Exposed height: 25'-0"

4 - 9" Cast aluminum cleat

Cleat height: 5'-0"

Foundation: 3'-6"

6"

12"

36"

Aluminum flash collar

3000 PSI concrete

Hardwood wedges
(supplied by others)

Dry sand tightly tamped
after aligning pole

Foundation sleeve -16 ga
hot dip galvanized steel

Steel centering wedges

1/4" Steel base plate

1/4" Steel support plate
welded to grounding spike


Overall length: 27'-0"

UPPERMAST DIMENSIONS

Top diameter: 3-1/2"
Tapered length: 8'-6"
Straight length: 0
Wall thickness: .188"

LOWERMAST DIMENSIONS

Setting Depth: 3'-0"
Overall length: 16'-6"
Butt diameter: 6"
Tapered length: 5'-6"
Straight length: 11'-0"
Wall thickness: .188"

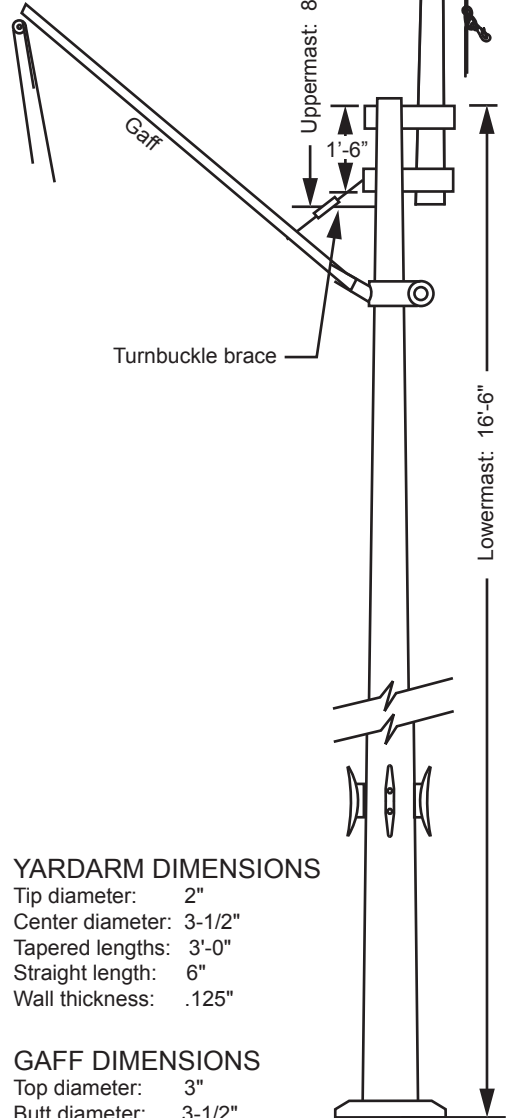

YARDARM DIMENSIONS

Tip diameter: 2"
Center diameter: 3-1/2"
Tapered lengths: 3'-0"
Straight length: 6"
Wall thickness: .125"

GAFF DIMENSIONS

Top diameter: 3"
Butt diameter: 3-1/2"
Tapered length: 5'-6"
Straight length: 0
Wall thickness: .125"

Project:	Ground set tapered aluminum flagpole: ALLOY: 6063T6	EDER FLAG	Date:
Location:	Exposed height: 25'-0"	Overall height: 27'-0"	MANUFACTURING COMPANY
Architect:	Ship in 2 sections	Butt diameter: 6"	1000 W. Rawson Avenue
Contractor:	Top diameter: 3-1/2"	Wall thickness: .188"	Oak Creek, WI 53154
Customer:	Finish: 100 grit polish		Job: