



Model ECPDM35

6" - 14 gauge spun aluminum ball
gold anodized

Single sheave truck, cast aluminum
revolving, non-fouling type

2 Bronze swivel snaps with covers
per halyard

Gaff

8'-6" Yardarm

3-1/2" center

2" ends

Exposed height: 35'-0"

4 - 9" Cast aluminum cleat

Cleat height: 5'-0"

Overall length: 38'-6"

Aluminum flash collar

3000 PSI concrete

Hardwood wedges
(supplied by others)

Dry sand tightly tamped
after aligning pole

Foundation sleeve -16 ga
hot dip galvanized steel

Steel centering wedges

1/4" Steel base plate

1/4" Steel support plate
welded to grounding spike

Foundation: 4'-0"

3'-6"

6"

12"


8"
16"
36"

UPPERMAST DIMENSIONS

Top diameter: 3-1/2"
Tapered length: 12'-0"
Straight length: 0
Wall thickness: .188"

LOWERMAST DIMENSIONS

Setting Depth: 3'-6"
Overall length: 26'-0"
Butt diameter: 7"
Tapered length: 19'-0"
Straight length: 10'-0"
Wall thickness: .188"

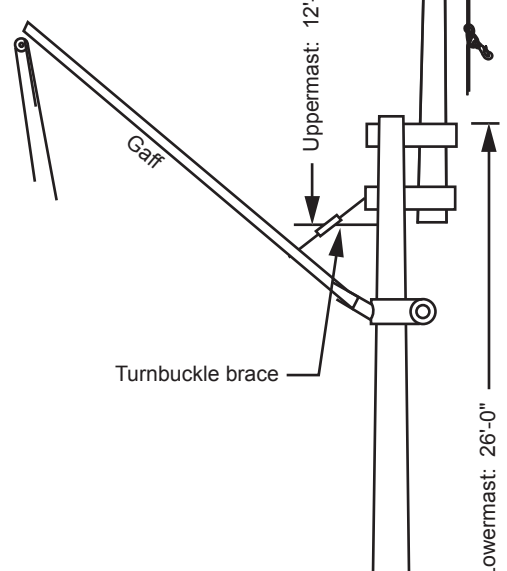

YARDARM DIMENSIONS

End diameter: 2"
Center diameter: 3-1/2"
Overall length: 9'-6"
Wall thickness: .125"

GAFF DIMENSIONS

Top diameter: 2"
Butt diameter: 3-1/2"
Overall length: 7'-6"
Wall thickness: .125

Project:	Ground set tapered aluminum flagpole: ALLOY: 6063T6	EDER FLAG	Date:
Location:	Exposed height: 35'-0"	Overall height: 38'-6"	MANUFACTURING COMPANY
Architect:	Ship in 2 sections	Butt diameter: 7"	1000 W. Rawson Avenue
Contractor:	Top diameter: 3-1/2"	Wall thickness: .188"	Oak Creek, WI 53154
Customer:	Finish: 100 grit polish		Job: